
FINISHING

RIDING TROWELS: MECHANICAL SUPER PRO // MSP SERIES

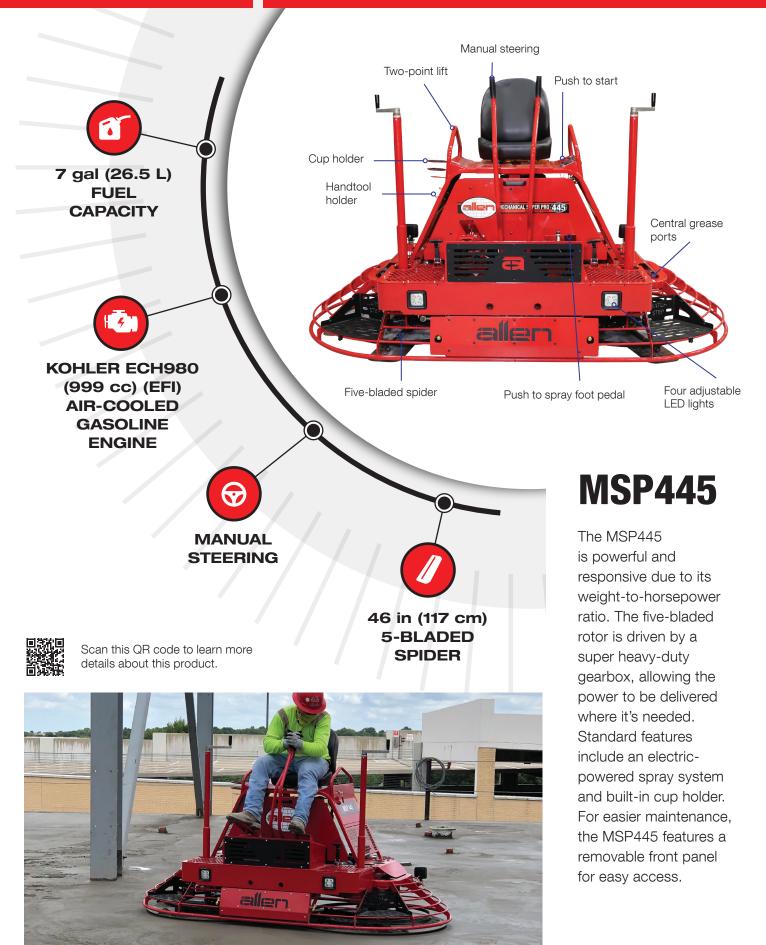

SPECIFICATIONS

SPECIFICATIONS	MSP445
ENGINE	Vanguard 61G2 EFI (993 cc)
HORSEPOWER CLASS	37 hp (27.6 kW)
FUEL TYPE	Air-Cooled Gasoline
PANNING PATH WIDTH	97.5 in (248 cm) 8' Class
ROTOR DIAMETER	46 in (117 cm) 5-Bladed Spider
MAXIMUM ROTOR SPEED	180 rpm
STEERING CONTROL SYSTEM	Manual
FUEL CAPACITY	7 gal (26.5 L)
RETARDANT CAPACITY	7 gal (26.5 L)
WEIGHT	1,052 lb (477 kg)
DIMENSIONS (L X W X H)	101.5 x 50.5 x 59.5 in (257.8 x 128.2 x 151 cm)

PART NO.	MODEL NO.	DESCRIPTION	
071200	TR-MSP445	Mechanical "TC" Torque Converter Clutch Drive, Manual Steering, Super HD Gearboxes, Twin 46" (117 cm) 5-blade rotors, Kohler CH1000 gas 37 hp class engine, 4 lights, power retardant spray, 45-180 RPM Rotor Speeds	
PART NO.	MODEL NO.	OPTIONAL ACCESSORIES	
	MUDEL NU.	UF HUNAL AGGESSONIES	
039090	TR-DJMSP	Dolly Jacks, Pneumatic Tires, Set of two, 121 lb (55 kg)	

BLADE & PAN RECOMMENDATIONS

BLADES		MSP445
ТҮРЕ	PART NO.	DESCRIPTION
FINISH	015695AV-4	6" x 18" Finish - Silver Series
FLAT FINISH	028489V-4	6" x 18" Flat Finish - Silver Series, COMES WITH THE MACHINE
СОМВО	016094AV-4	8" x 18" Combo - Blue Series
CLIP-ON FLOAT (LH)	02822318V-4	10" x 18" Clip-On - Left Hand - Silver Series
CLIP-ON FLOAT (RH)	02822618V-4	10" x 18" Clip-On - Right Hand - Silver Series
PLASTIC FINISH	047230-4	6" x 18" - Finish - Poly / Steel Backed
PANS		MSP445
ТҮРЕ	PART NO.	DESCRIPTION
CLIP-ON DISHED	051561	46.5" O.D 45º Lip Angle - 5-Blade
SAFETY CATCH DISHED	051562	46.5" O.D 45° Lip Angle - 5-Blade
CLIP ON FLAT	051552	46.5" O.D 80° Lip Angle - 5-Blade
SAFETY CATCH FLAT	051553	46.5" O.D 80° Lip Angle - 5-Blade