



**120 rpm
MAXIMUM
ROTOR
SPEED**




**Duromax XP18HPX
(439 cc)
GASOLINE/PROPANE
ENGINE**



**18 hp (13.4 kW)
HORSEPOWER**



**36 in (91 cm)
4-BLADES**

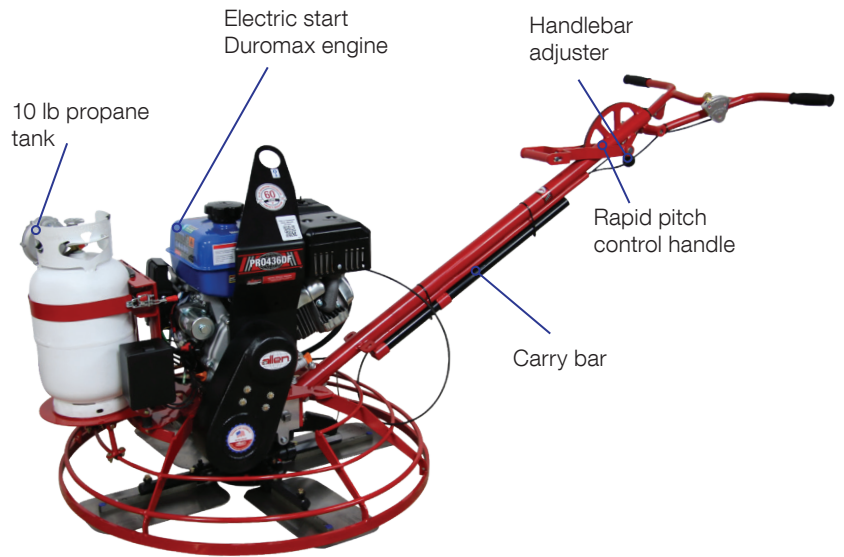

PRO436DF

Introducing our Pro436DF, equipped with a dual fuel 18 hp class Duromax Engine with electric start. This versatile walker offers the option of our Fine Pitch or newly redesigned Rapid Pitch handle, catering to the needs of indoor and outdoor job-sites. Built to tackle the most demanding tasks, the Pro436DF is the ideal choice for customers working in smaller areas or buildings.



Scan this QR code to learn more details about this product.



SPECIFICATIONS

SPECIFICATIONS		PRO436DF
ENGINE		Duromax XP18HPX (439 cc)
HORSEPOWER CLASS		18 hp (13.4 kW)
FUEL TYPE		Gasoline and Propane
ROTOR DIAMETER		36 in (91 cm) 4-blades
MAXIMUM ROTOR SPEED		120 rpm
TROWEL ARMS & SPIDER		Standard Duty
WEIGHT		246 lb (111.6 kg)
DIMENSIONS (L X W X H)		72 x 38 x 36 in (182.8 x 96.5 x 91.4 cm)
PART NO.	MODEL NO.	DESCRIPTION
078350	TWP436DF	PRO436DF - 18 hp class engine, electric start, fine pitch handle, stationary guard ring, lift hook
078360	TWP436DF	PRO436DF - 18 hp class engine, electric start, rapid pitch handle, stationary guard ring, lift hook
PART NO.	MODEL NO.	HANDLE OPTIONS
063975	TWPHF-L	Fine pitch handle w/ carry bar & handle pad for PRO Walkers, 33 lb (15 kg)
070300	TWPHR-L	Rapid pitch handle w/ carry bar & handle pad for PRO Walkers, 33 lb (15 kg)

BLADE & PAN RECOMMENDATIONS

BLADES	PRO436DF
FINISH	015890V-4: 6" x 14", Finish - Silver Series
FLAT FINISH	051317-4: 8" x 14", Flat Finish - Silver Series
COMBO	016095V-4: 8" x 14", Combo - Silver Series COMES WITH THESE BLADES
CLIP ON FLOAT (RH)	02822614-4: 10" x 14", Clip-On Float - Silver Series
PLASTIC FINISH	047229-4: 6" x 14", Finish - Poly / Steel Backed
PANS	PRO436DF
CLIP-ON DISHED	N/A
CLIP ON FLAT	047128 - 36.5" O.D. 67° Lip Angle
SAFETY CATCH FLAT	047130 - 36.5" O.D. 67° Lip Angle



Fine pitch handles use a twist action to control blade pitch from flat to 28° and anything in between.



Rapid pitch handles use a ratcheting action to provide easy adjustment with the push or pull of a lever.